



Samsung Galaxy Light Motherboard Replacement

Replace the motherboard.

Written By: Diandra



INTRODUCTION


Replace the motherboard on your Samsung Galaxy Light.




TOOLS:

- [iFixit Opening Tools](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Removing back cover

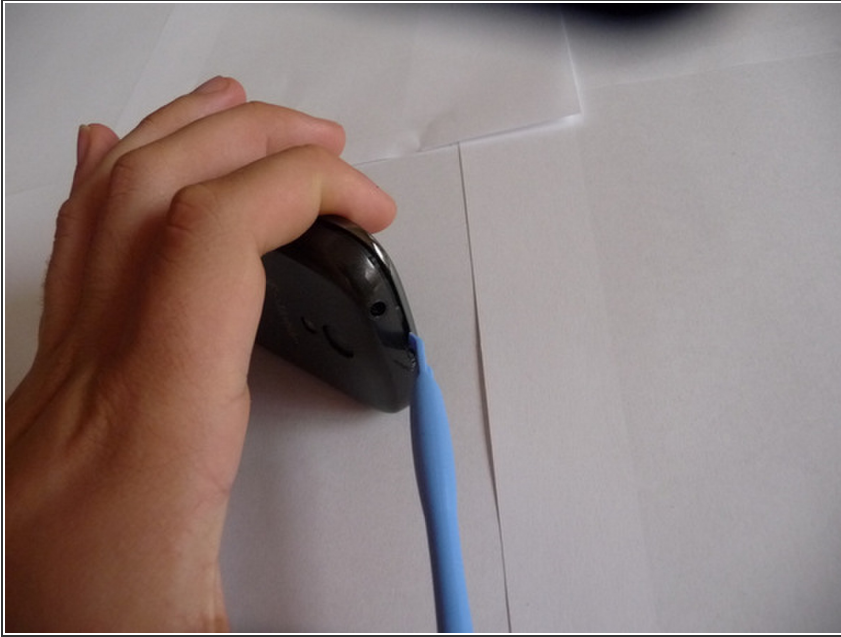

 Before removing the back cover, make sure the Samsung Galaxy Light is switched off.

- Using a plastic opening tool, lift up the back cover of the device.
- Remove the back cover.

Step 2 — Lifting battery out



- Using your finger, remove the battery from the device.

Step 3 — Unscrew motherboard from plastic protection



- Using a Phillips #0 screwdriver, remove 9 screws.

Step 4 — Removing the cover



- Using the plastic opening tool, separate the midframe from the front panel of the device.
- Remove the midframe.

Step 5 — Detach motherboard



- To detach the motherboard from the device:
 - Using the plastic opening tool, remove the connector from the motherboard.
 - Carefully lift the motherboard up and move it toward the left side of the device.
 - Using the plastic opening tool, remove the connector on the back side of the motherboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-17 09:08:27 PM.